

FleXbus □□ , 960 mm², 2,000 mm x 50 mm x 50 mm x 25 mm x 8.9 kg

Data Solutions

???

FLEXCOND960L2



nVent ERIFLEX FleXbus
 ???
 ?????????????????????FleXbus Advanced
 ???FleX
 bus????????????????LSHFR?????II????????FleXbus????????????
 ?????????????????2-25????????????????500A-
 6300A????????1600KVA????????????????????????????????3150KVA
 ?????????????????

??



??

????????????
 ?????????????????
 ??????
 ??????
 ?????????????
 ?????400KVA?560A??1600KVA(2250A)?,????????2000kVA (2800 A) ? 3150kVA (4435 A)????????

????


??? : 508040
 ??? : 960mm²

?? 1 (L1): 2000mm
?? 2 (L2): 100mm
????: ???
?????: ??
?????: ?
?????: 500% min
????: 2.5 – 3.5mm
????: 20kV/mm
?????: UL® 94V-0
?????: UL® 2885; IEC® 60754-1; IEC® 62821-2
?????: IEC® 61034-2; ISO 5659-2; UL® 2885
?????: IK09
?????: UL® 2556; UL® 854
????: 0.2mm
?????IEC: 1000V; 1500V
???????EN 50264-3-1: 6000V
????: ?50 to 115°C
?: IEC® 60695-2-11??????? 960 °C?; IEC® 61439.1; IEC® 61439.1 II ?; IEC® 60364
?T 60 K: 1761A
?? 1 (W1): 108mm
?? 2 (W2): 100mm
?? [1] (H1): 28.15mm
?? [2] (H2): 14.8mm
??? (HS): 14mm
????: 8.9kg
A: 50mm
B: 50mm
C: 25mm
D: 25mm
2 ??????????: 1.48
2 ??????????: 2
????: AS 3008; BS 7671; CEI 64-8; CSN; DIN VDE 0100; HD 384; IEC® 60364; NBR 5410; NEN 1010; NFC 15-100; NIBT-NIN; NP (2002); ÔNORM; REBT; RGIE-AREI

??????

????????????????

□□□□□□□□								
??	?T 30°C	?T 40°C	?T 45°C	?T 50°C	?T 55°C	?T 60°C	?T 65°C	?T 70°C
????	0.71	0.82	0.87	0.91	0.96	1.00	1.04	1.08

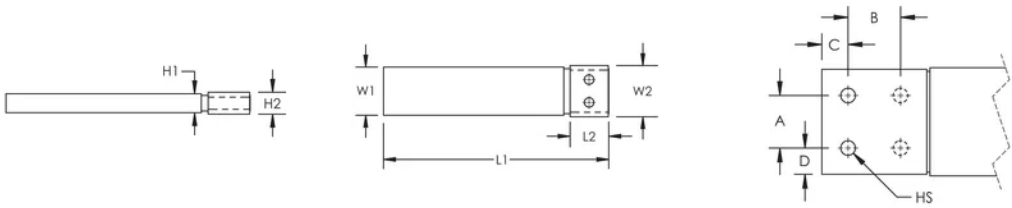

???? nVent ?????????????????? nVent ???????? www.nvent.com ???????????? nVent ?????????????????????????????????????? nVent
??/??????????????



?????????????:
CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE