

SBLL-250

Data Solutions

???

SBLL-250



??



??

??????????????

????????? nVent ERIFLEX Flexibar ???????

????????????????????

??????

??????????????????

????? DIN ????????????

????????? SBLEC ????????

?????????????????????????????(RoHS) ??

???

????

???: 561132

?: ?; ??

?: ??

????????IEC: 290A


??????UL/CSA: 255A
????? (ICW) 1 ? : 14.4kA
????? (Ipk): 42kA
????? (SCCR): 100kA
??????IEC (Ui): 1000; 1500
??????UL (Vin): 1000
?????: 2
??????: 20 – 24 mm
?????????: 10 – 120 mm ²
??????: #8 - 250 kcmil
?? (D): 65mm
?? (H): 205.7mm
?? (W): 52.3mm
A: 108mm
????: 0.16kg
?????: UL® 1059
?????: UL® 94V-1
?: IEC® 60947-7-1

??????

????????????????????

????*?? (°C) ????? 85°C ?????										
???? (°C)	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°
???? (d)	1	1	1	0.94	0.88	0.82	0.75	0.67	0.58	0.47
*???????????										

?

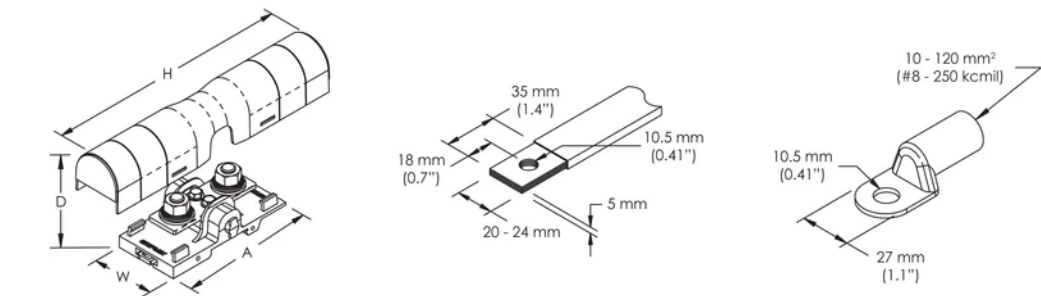

??

???? nVent ?????????????????? nVent ??????? www.nvent.com ??????????? nVent ?????????????????????????????????????? nVent
??



?????????:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE