


SBLT-250

Data Solutions

???

SBLT-250



??



??

??????????????

?????????????? nVent ERIFLEX Flexibar ???????

????????????????????

??????

????????????????????

????? DIN ?????????????

????????? SBLEC ?????????

?????????????????????????????(RoHS) ??

???

????

???: 561140

??: ?; ???

?: ??

????????IEC: 350A


???????UL/CSA: 300A
?????? (ICW) 1 ? : 8.4kA
?????? (Ipk): 30kA
?????? (SCCR): 100kA
???????IEC (Ui): 1000; 1500
???????UL (Vin): 1000
?????: 1
?????????: 20 – 24 mm
?????????????: 10 – 120 mm ²
?????????: #6 - 250 ????
?????: 2
?????????????: (2) 10 – 50 mm ²
???????? - ??: (2) 10 – 35 mm ²
?????????: (2) #8 – 1/0
?? (D): 65mm
?? (H): 205.7mm
?? (W): 52.3mm
A: 108mm
????: 0.27kg
?????: UL® 1059
?????: UL® 94V-1
?: IEC® 60947-7-1

??????

????????????????????????????

????*?? (°C) ????? 85°C ?????										
???? (°C)	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°
???? (d)	1	1	1	0.94	0.88	0.82	0.75	0.67	0.58	0.47
*????????????										

?

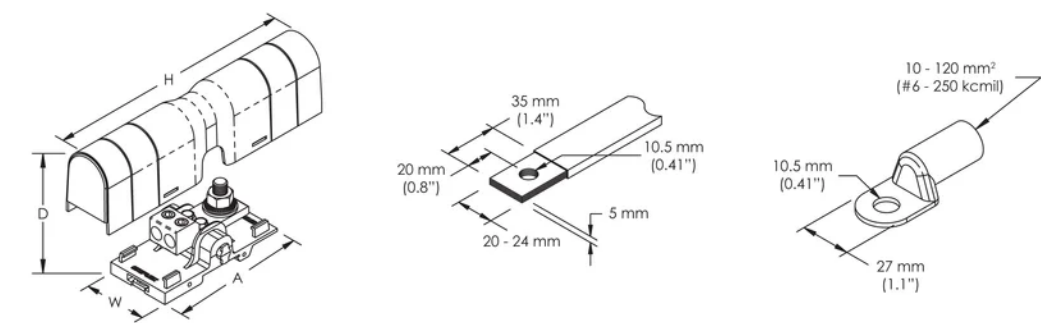

??

??? nVent ?????????????? nVent ?????? www.nvent.com ?????????? nVent ?????????????????????????????? nVent
??



?????????:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE