

# DT    , 240 kA,    , 277/480 V, 3Ph Y 4W+G

## Data Solutions


???

### DTX240F480Y



nVent ERICO DTX240    (SPD)  
   IEC I    II    UL 1    2  
   B    DTX240     
 240 kA    C     
 (MCC)   (HVAC)    nVent ERICO DTX240     
 NEMA®-4X   

??

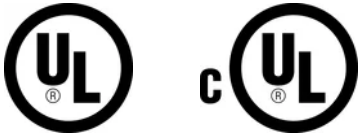

??

- ???????????????? (UL)
- ????????/??? SPD ????????????
- ????????????????????????
- RS-485 ????
- ?? 53 dB ???10 kHz ? 100 MHz?
- 10 ???

????

- ?????? (Un): 277/480 V
- ?????: 3 ? 4W+G
- ???????? (Uc): 350/700 VAC
- ?????? (In)?UL: 20kA 8/20 ?s
- ?????? (Imax)???: 240kA 8/20 ?s

???? (Iimp)?????: 12.5kA 10/350 ?s

?: -29 dB @ 100 kHz

?: 50 – 60Hz

??????? (VPR)?L-G: 1200V

??????? (VPR)?L-L: 1800V

??????? (VPR)?L-N: 1200V

??????? (VPR)?N-G: 1200V

????: L-N; L-PE; N-PE

?????? (SCCR): 200kA

?????? (In)?IEC: 40kA 8/20 ?s

?????? (Up)?IEC: 1200 V @ 20 kA; 3000 V @ 100 kA

?????? (Iscrr): 50kA

?: 240 to 80°C

????: ??? PC ?

?????: NEMA®-4X; UL® 50E 4 ?

????: 2.5 – 16mm<sup>2</sup>

?: 8 ?????

?????????: 2.0 A @ 240 V

????: ?C ??

????: ??????????; ??? LED; ???; OLED ???; ??/TOV ???????

?: ????????????

?????: CSA C22.2 ? 269.2 ?; UL® 1283 ? 7 ?; UL® 1449 ? 5 ? 2 ??20 kA ??

?: ANSI®/IEEE® C62.41.2-2002 A ??B ??C ?; ANSI®/IEEE® C62.41.1-2002 A ??B ??C ?; ANSI®/IEEE® C62.45-2002 A ??B ??C ?; EN 61643-11 2 ?; IEC® 61643-11 II ?

?? (D): 98.3mm

?? (H): 330.7mm

?? (W): 222.5mm


????: 5.45kg

????: DT2350M

??????

????????????DTX240FP ? DTX240SM

?



??

??? nVent ?????????????? nVent ?????? www.nvent.com ?????????? nVent ?????????????????????????????????????? nVent  
??/?????????????



??????????:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE