

FleXbus 640 mm² 4,000 mm x 25 mm x 25 mm x 12.5 mm x 11.8 kg

Data Solutions

???

FLEXCORE640L4



nVent ERIFLEX FleXbus
 ???
 ???
 ???
 ???
 ????????????????????? (LSHFFR) ????? II
 ????????????????????????????????????? 2-25 ????????????????????? 500A ?
 6300A ????????????? 1600kVA ?????????????????????????????????
 3150kVA ?????????????????????

??



??

????????????????????

????????????????????

??????????

??????????

????????????????????????????????

???? 400kVA (560 A) ? 1600kVA (2250 A) ????????????????????????? 2000kVA (2800 A) ? 3150kVA (4435 A) ?????????????????

FleXbus ?????????????????????

????

??? : 508474


???? : 640mm²

?? 1 (L1): 4000mm
?? 2 (L2): 75mm
????: ???
????: ???????
???: ?? GB/T 34016-2017 ? DIN EN 117 ????
?????: ??
?????: ?
?????: 500% min
????: 2.5 – 3.5mm
?????: UL® 2885; IEC® 60754-1; IEC® 62821-2
?????: IK09
?????: UL® 2556; UL® 854
?????: IEC® 61034-2; ISO 5659-2; UL® 2885
????: 20kV/mm
?????: UL® 94V-0
????: 0.2mm
?????IEC: 1000V; 5000V
???????EN 50264-3-1: 6000V
????: ?50 to 115°C
?: IEC® 60695-2-11???????? 960 °C?; IEC® 61439.1; IEC® 61439.1 II ?; IEC® 60364
?T 60 K: 1233A
?? 1 (W1): 58mm
?? 2 (W2): 50mm
?? [1] (H1): 31.15mm
?? [2] (H2): 21.3mm
??? (HS): 11mm
????: 11.8kg
A: 25mm
B: 25mm
C: 25mm
D: 12.5mm
2 ??????????: 1.51
2 ??????????: 2
????: AS 3008; BS 7671; CEI 64-8; CSN; DIN VDE 0100; HD 384; IEC® 60364; NBR 5410; NEN 1010; NFC 15-100; NIBT-NIN; NP (2002); ÔNORM; REBT; RGIE-AREI

??????

??????????????????

??	?T 30°C	?T 40°C	?T 45°C	?T 50°C	?T 55°C	?T 60°C	?T 65°C	?T 70°C
????	0.71	0.82	0.87	0.91	0.96	1.00	1.04	1.08

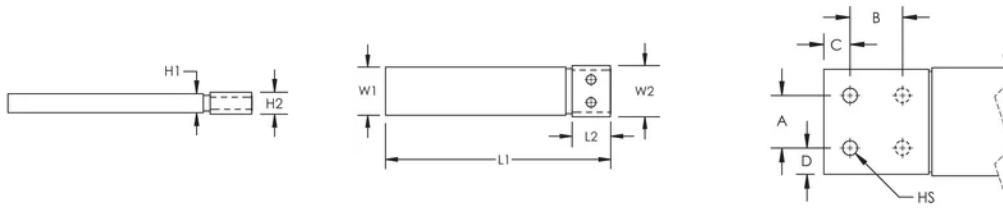

???? nVent ?????????????????? nVent ??????? www.nvent.com ???????????? nVent ?????????????????????????????????????? nVent
??/??????????????



???????????:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE