


□□□ , □□ -□□ , 230 A IEC, □ ,
□□□□□

Data Solutions

???

SB160AL



nVent ERIFLEX

????????????????????(???????)??/?????? DIN

????/?????????????????????????????????

????????????????????4????nVent ERIFLEX Flexibar Advanced,
??IBSB Advanced ?????

??



??

??????????????? nVent ERIFLEX Flexibar Advanced ? IBSB Advanced ?????

????????????????

????????????????????????????

????????????

????????????????

????????????????

????? DIN ???????????

????????

??? 95%

????????????????????(RoHS) ??

?? EN 45545???? R23 ?? HL3 ??? R22 ?? HL2 ?


????????? ??????

???: 561162
?: ??
?: ??-??
????????IEC: 230A
?: ?; ???
????????IEC: 70 mm²
????????IEC: 70 mm²
????? (ICW) 1 ?: 14.4kA
???????IEC: 230A
????????UL/CSA: 200A
????? (Ipk): 42kA
???????? (ICC): 20kA
????? (SCCR): 100kA
???????IEC (Ui): 1000; 1500
????????UL (Vin): 1000
????????: 1
?????????: 35-70 mm²; #2 - 3/0
?????????: 35-70 mm²; #2 - 3/0
????????: 1
???????? - ??: 35-70 mm²
?? (D): 55mm
?? (H): 111mm
?? (W): 27.7mm
????: 0.1kg
?????: UL® 1059
?: IEC® 60947-7-1
?????: IP 20
?????: UL® 94V-0

SBF250?SB250SPCR?????UL1953????? ??UL® 1953??????????1250VAC/DC?

????????????????7%

nVent.com | 2

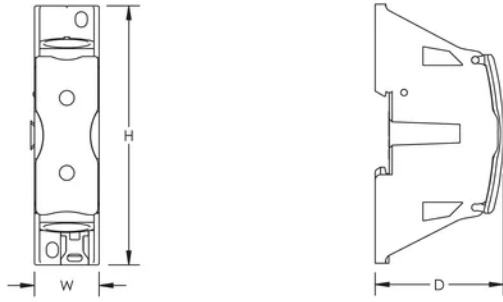

???? nVent ?????????????? nVent ??????? www.nvent.com ?????????? nVent ????????????????????????????????? nVent
??/????????????



?????????:
CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE