

□□□□□, 250 A IEC, 255 A UL/CSA,
 □□ Line, 11 □□□ Load, □ ,
 □□□□□

Data Solutions

???

UD-250A



??



??

????????????????????

??????????

????????????

????????????

????? DIN ????????????

??? 95%

????????????????(RoHS) ??

?? EN 45545???? R23 ?? HL3 ??? R22 ?? HL2 ?

???

??????????


????

???: 569040
?: ??
???????IEC: 250A
???????UL/CSA: 255A
?????: ??
?????: 11 ???
?: ?; ???
?????????IEC: 120 mm²
?????????IEC: 35 mm²
???????IEC (Ui): 1000
???????UL (Vin): 600
?????? (ICW) 1 ? : 24.5kA
?????? (Ipk): 51kA
???????? (ICC): 24.3kA
?????? (SCCR): 100kA
????????: 1
????????????: 35 - 120 mm²
????????: 6 – 250
????????: 11
????????????: (2) 6 - 35 mm²; (4) 2,5 - 10 mm²; (5) 2,5 - 16 mm²
???????? - ??: (2) 6 - 25 mm²; (4) 2,5 - 10 mm²; (5) 2,5 - 16 mm²
????????: (2) #10 - #1; (4) #14 - #6; (5) #14 - #4
?????: IP 20
?? (D): 50mm
?? (H): 96mm
?? (W): 49mm
????: 0.42kg
?????: UL® 1059
?????: UL® 94V-0
?: IEC® 60947-7-1

??????

????????????160A?IEC????????????
UL ?????????1000V AC/DC????????

■■■■■■■■■■■■■■■■■■■■										
????*?? (°C) ????? 85°C ?????										
???? (°C)	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°
???? (d)	1	1	1	0.94	0.88	0.82	0.75	0.67	0.58	0.47
*????????										

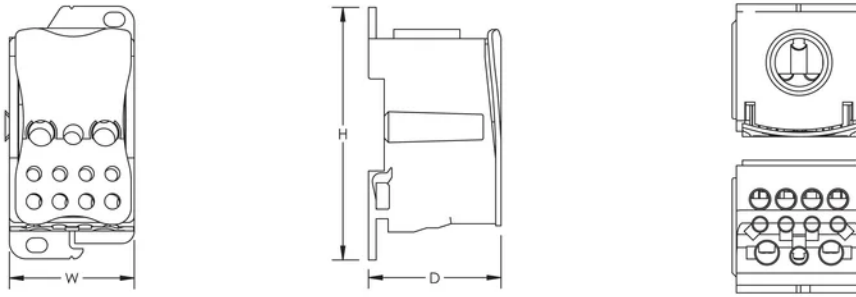

???? nVent ?????????????????? nVent ??????? www.nvent.com ???????????? nVent ??? nVent
??/??????????????



?????????:
CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE