

nVent CADDY Superfix 243 M8/M10, 74-80 mm OD, 2 1/2" Pipe, 65 DN

???

SXD080



??



??

Includes easy closing mechanism

Combo head bolt works with slotted, hex, or Phillips drivers

Category II noise reduction according to DIN EN ISO 3822-1

Compliant for sound insulation design according to DIN 4109

Reaction-to-fire classification is "E" in compliance with DIN EN 13501-1

????

???: 400074

??: ?;EPDM-SBR ??

??: ???

??: ??

??: -50 to 110 °C

?? (OD): 74 - 80 mm

????: 2 1/2"

NB/DN: 65


?? (RS): M8;M10

?? (W): 20 mm
?? (T): 2 mm
???? (Sc): 6
???? (L): 35mm
????: 1300N

??????

Lining is EPDM rubber.

?

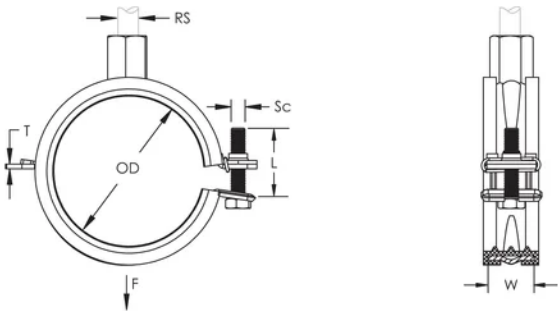

??

???? nVent ?????????????????? nVent ???????? www.nvent.com ?????????????? nVent ??? nVent
??/??????????????

??	??	??	????
+1.800.753.9221	???	???	???
?? 1 ?????	+31 800-0200135	800 1890272	+ 86 21 2412 1618/19
?? 2 ?????	???	????/???	???
	+33 800 901 793	+31 13 5835404	+61 2 9751 8500



??????????:
 CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE